

# LADDER-MAX<sup>®</sup>

## STAND-OFF STABILIZER

*The Ultimate Ladder Accessory*



8810 N. University  
Peoria, IL 61615  
Phone (309) 692-3230  
Fax (309) 692-1120  
Toll Free (800) 383-3231  
www.lynchaluminum.com  
E-mail: la8810@aol.com

**EXCITING NEW  
INDUSTRIAL DESIGN**



*Paint and Make Repairs Safely.*



*Install and Clean Gutters Safely!*



*Protect Gutters or Roof Edge.*



### Promotes Ladder Safety

- **Standoff 19" From Sidewall or Roof**
- **On and Off Ladder in "10 seconds"**
- **Rugged Durable Steel Construction**
- **Designed, Tested and Certified for Roof Placement**

- First stand-off designed, tested and certified for roof placement
- Increases safe access to and from roof
- Improves ladder stability and function
- Safety orange tip designed with 4 points of contact to decrease lateral and horizontal ladder movement
- Slip resistant steps
- More natural work angle
- Climb a ladder with more confidence

# LADDER-MAX<sup>®</sup>

## LADDER STAND-OFF STABILIZER

*The Ultimate Ladder Accessory*

\* **Complies with  
OSHA  
Requirements**

### Product Features and Benefits




*Use For Sidewall Work.*

#### Increased...

- Safety
- Stability
- Confidence
- Convenience

- \* ■ Meets or exceeds OSHA and ANSI Standards for 14.1, 14.2, 14.5, and new 14.10 for Type 1AA special duty 375# rating
  - Rugged, durable steel construction
  - User friendly – attaches to ladder in “10 seconds”
  - Fits extension and articulated ladders – aluminum, fiberglass, wood
  - Light-weight, rust and corrosion resistant
  - Heavy duty non-marring flexible plastic tips
- **Protect fascia, siding and paint**
  - **Defend against damage to gutters from scratching or denting**
  - **Protect roof edge – composition, shake or metal**
  - **Simplifies working around overhangs and windows**

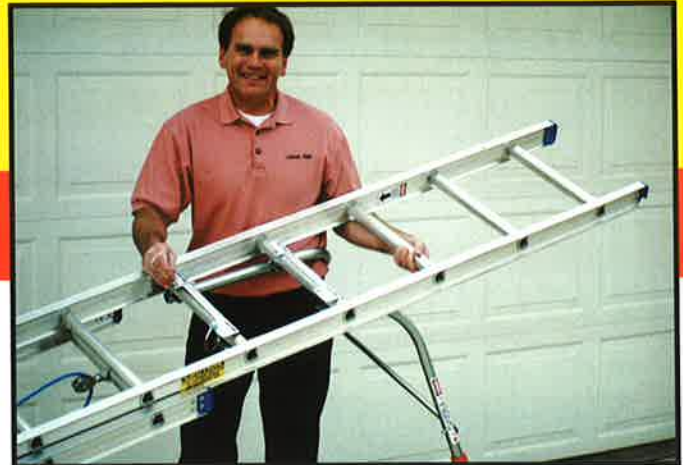

*Use On Any Two Rungs.*

### SPECIFICATIONS

#### Assembled Dimensions:

Height:	20-3/4"	(52.7cm)
Width:	38-1/2"	(97.8cm)
Depth:	19"	(48.3cm)
Weight:	7 lb. 11 oz.	(3.49kg)
Ship. Wt:	9 lb. 6 oz.	(4.25kg)

Specifications subject to change without notice.

### MATERIALS

16 g. heavy duty galvanized steel steps  
Zinc-plated steel nuts, bolts, and washers  
16 g. heavy duty galvanized steel tubing  
Zinc anodized spring steel wire loop  
Zinc anodized steel lock pin  
Safety orange plastic tip  
Replacement Parts Available.

**Proudly Fabricated, Packaged  
and Printed in The USA**



PATENT PENDING #60/399,471, TRADEMARKED.

### Lynch Aluminum

8810 N. University • Peoria, IL 61615 • Phone (309) 692-3230 • Fax (309) 692-1120 • Toll Free (800) 383-3231  
www.lynchaluminum.com • E-mail: la8810@aol.com